

Bridge DAQ


輕巧便利的橋式放大器



系統特色

- 適合量測：
Loadcell、Torque transducer
- USB 量測介面
- 24 bit 高解析度
- 測量速度高達 500 S/sec.
- 外型堅固可搭配鋁軌安裝
- 接線端子可接全橋
- 提供免費 Bridge DAQ 操作軟體



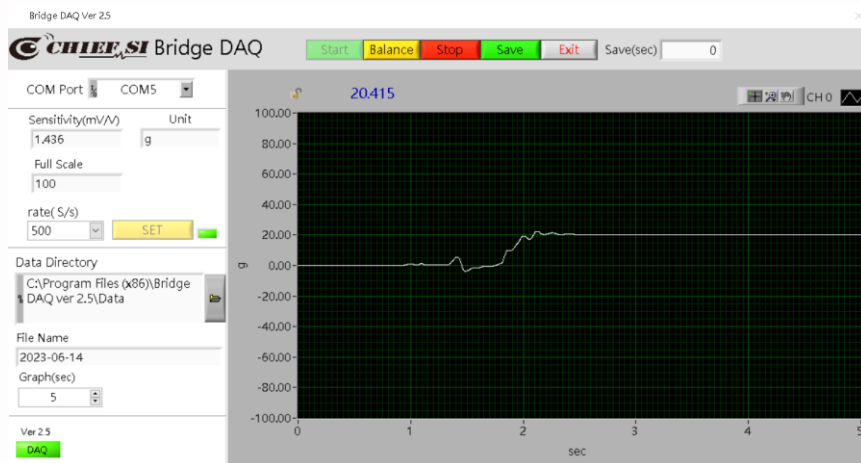

產品規格

| | |
|-------------------------------|------------------------------|
| Channel | 1 |
| Sampling rate (Sample/sec) | 500、200、100、40、10 Hz |
| Range | 0.1~6mV/V |
| Resolution | 24-bit |
| Excitation | 5.0 Vdc±2% |
| Auto Balance | Support, Software control |
| Interface | USB to RS-485 |
| USB Cable | 1m, USB (Type A male) |
| Dimension | 82 x 76 x 24 mm |
| Weight | ~130 g |
| Environment | -30 ~ +60°C |
| Power supply | DC10~30V |
| Bridge DAQ Software | Sensitivity & Full scale |
| | Sampling rate(S/s) |
| | Data logging : CSV format |
| | Balance : support |
| | Graph display : support |
| | Digital display : support |
| Housing Material | Aluminum |
| Support OS | Windows 10 and later version |